


Product Name

ACCOSOFT[®] 501

Chemical Structure

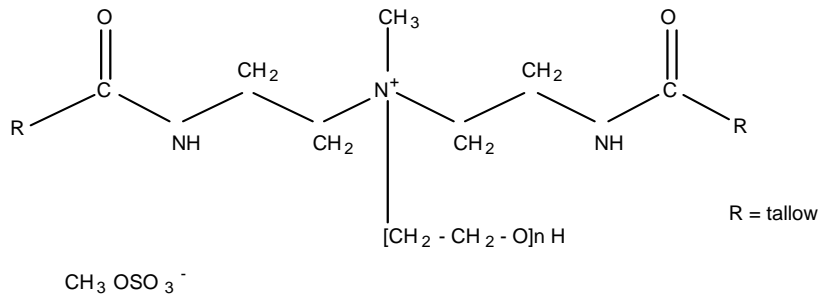

Chemical Description

Methyl bis(tallowamido ethyl) -2- hydroxyethyl ammonium methyl sulfate

CAS Registry No.

68410-69-5

Applications

ACCOSOFT 501 is a fabric softener quaternary for use in household and commercial products. It can be used in a full range of dispersion concentrations with excellent storage stability and easy formulation. ACCOSOFT 501 will produce 2.5 - 25% solids dispersions with a minimum of electrolyte. These dispersions exhibit instant cold water dispersibility. ACCOSOFT 501 offers good rewet and is non-yellowing.

Typical Properties

Appearance at 25°C	Off-white paste
pH, 10% in water/IPA	6
Solids, % by wt.	88
Color, Gardner.....	3 max.
Density, g/ml (lbs/U.S. gal).....	0.97 (8.1)
Pour Point, °C (°F).....	20 (68)
Min. Handling Temp. (MHT), °C (°F).....	27 (80)
Viscosity at MHT, cps.....	1400
Flash Point, PMCC, °C (°F).....	24 (76)
RVOC, U.S. EPA, % (Isopropanol)	12

Biodegradability

Product is biodegradable. A detailed biodegradability statement is available upon request.

Toxicity

ACCOSOFT 501 is practically non-toxic orally (LD₅₀ > 20 g/kg) and causes no eye irritation 21 days post dosing. It is minimally irritating to skin and is not a skin sensitizer.

Storage & Handling

Handle ACCOSOFT 501 with care; use away from sparks and open flame. Use in a well ventilated area. Contact with the eyes and prolonged contact with the skin should be avoided. Use gloves and safety goggles when handling ACCOSOFT 501.

Standard Packaging: ACCOSOFT 501 is available in drums (425 lb, 193 kg) or bulk quantities.

ACCOSOFT[®] is a registered trademark of Stepan Company.



Storage & Handling

The color and odor of ACCOSOFT fabric softener quaternaries are susceptible to degradation as a result of exposure to high temperatures, particularly in the presence of air. ACCOSOFT 501 contains sodium bisulfite as an antioxidant to preserve color. Successful long term storage, in liquid form, depends on maintaining a sodium bisulfite level of 200-1000 ppm. Methods for monitoring are available from Stepan Company.

It is recommended that ACCOSOFT 501 be stored in stainless steel storage tanks of type 304L minimum, 316L is preferred. Also acceptable are Fiber Reinforced Plastic (FRP) with an Atlac 382 type lining. Tanks should be padded with a nitrogen gas blanket, and equipped with conservation vents and flame arrestors. Tanks should be adequately insulated to maintain elevated temperatures. Generally, mixing is recommended to maintain homogeneity, either by a mechanical stirrer or recirculation loop.

Bulk storage facilities should be designed to maintain a minimum product temperature of 27°C (80°F) and a maximum temperature of 52°C (125°F). Hot water heating provided through No. 316L Stainless Steel heating coils is recommended. Steam heating through coils can be used.

No. 316L Stainless Steel centrifugal or positive displacement pumps should be used. Piping should be of No. 316L Stainless Steel, Schedule 40 or Steel Kynar lined P.V.F. Rubber hoses lined with Teflon or crosslinked polyethylene and equipped with No. 316L Stainless Steel fittings are recommended for loading and unloading. *Contact with brass, copper, and aluminum components must be strictly avoided.*

Clearances

All components of ACCOSOFT 501 are listed in the following countries; the registration numbers for the active ingredients are included in parentheses: Canada (DSL 68410-69-5) and Australia (AICS 68410-69-5).

Additional Safety Information

A Material Safety Data Sheet is available upon request.

Nothing contained herein grants or extends a license, express or implied, in connection with patents, issued or pending, of the manufacturer or others. The information contained herein is based on the manufacturer's own study and the works of others. The manufacturer makes no warranties, expressed or implied, as to the accuracy, completeness, or adequacy of the information contained herein. The manufacturer shall not be liable (regardless of fault) to the vendee's employees, or anyone for any direct, special or consequential damages arising out of or in connection with the accuracy, completeness, adequacy or furnishing of such information.

Stepan

Corporate Headquarters
Northfield, Illinois 60093, U.S.A.
847-446-7500 847-501-2100 fax
Website: www.stepan.com

For Technical Service Call: Northfield, IL USA 800-745-7837
Longford Mills, Canada 705-326-7329 • Mexico City, Mexico +52-555-533-1697
Voreppe, France +33-476-505-100 • Bogota, Colombia +57-1-6362808
Stalybridge, United Kingdom +44-141-338-9083
Manila, Philippines +632-891-1708

